
◆

CAPITAL COMPACTORS CS3 TWIN CYLINDER STATIC WASTE COMPACTION SYSTEM

◆

SPECIFICATION

	<u>Imperial</u>	<u>Metric</u>
Charge Box Volume	3.00 cu.yd	2.29 cu.m
Volume per stroke	2.40cu.yd.	2.00cu.m
Charge Box Length from Ram Face	51.18ins	1300mm
Charge Box Width	58.25ins	1480mm
Ram Depth	27.50ins	700mm
Cycle Time	80 secs	-- --
Compaction Force	42 tonnes	42,000 kgs
Running Hydraulic Pressure	2000 lbs psi	136.00 bars
Pinning Hydraulic Pressure	2300 lbs psi	156.00 bars
Mains Fuse	32 amp motor rated type D breaker	
Overall Length	133.80ins	3400mm
Overall Width	64.05ins	1645mm
Main Frame Height	51.00ins	1300mm
Ram Diameter	2 x 6.00ins	2 x 150mm
Sound Level at 3 metres from unit	70.00 dBA	70.00 dBA

Due to our policy of continual improvements and upgrading, we reserve the right to alter specifications without prior notice.


◆



CS3 Twin Cylinder Static Waste Compaction System with Hydraulic Rear Bin Lift & Fully Enclosed Personnel Safety Enclosure with Interlocking Gate



CS3 Static Compactor with Bin Lift Plan View

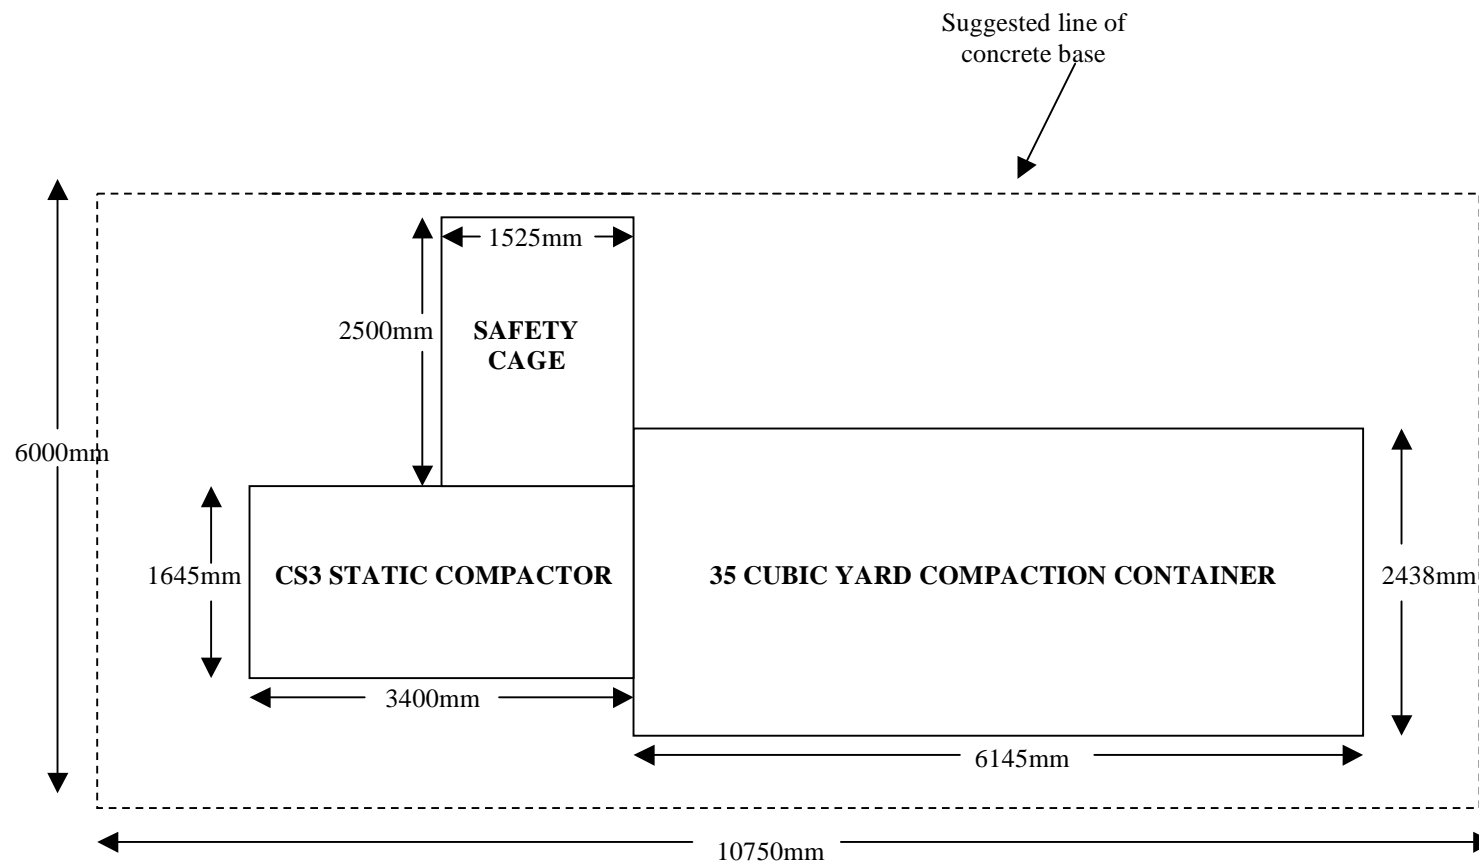

NB: Recommended thickness of concrete = 205mm (8 inches)

**Power Supply Required : 415V 3 Phase + Earth
32 Amp Motor Rated Fuses**

NB: Bin lift can be left hand or right hand loading.