
◆

CAPITAL COMPACTORS CS3 STANDARD DUTY STATIC WASTE COMPACTION SYSTEM

◆

SPECIFICATION

	<u>Imperial</u>	<u>Metric</u>
Charge Box Volume	3.00 cu.yd	2.29 cu.m
Volume per stroke	2.40 cu.yd.	2.00 cu.m
Charge Box Length from Ram Face	51.18ins	1300mm
Charge Box Width	58.25ins	1480mm
Ram Depth	27.50ins	700mm
Cycle Time	68 secs	-- --
Compaction Force	23 tonnes	23,000 kgs
Running Hydraulic Pressure	2000 lbs psi	136.00 bars
Pinning Hydraulic Pressure	2300 lbs psi	156.00 bars
Mains Fuse	32 amp motor rated	-- --
Overall Length	133.80ins	3400mm
Overall Width	64.05ins	1645mm
Main Frame Height	51.00ins	1300mm
Ram Diameter	5.00ins	125mm
Sound Level at 3 metres from unit	70.00 dBA	70.00 dBA

Due to our policy of continual improvements and upgrading, we reserve the right to alter specifications without prior notice.

◆




CS3 Static Waste Compaction System with Hydraulic Rear Bin Lift and Personnel Safety Enclosure with Interlocking Gate





Tel: 01243 837614
Fax: 01243 837615

CS3 Static Compactor Plan View

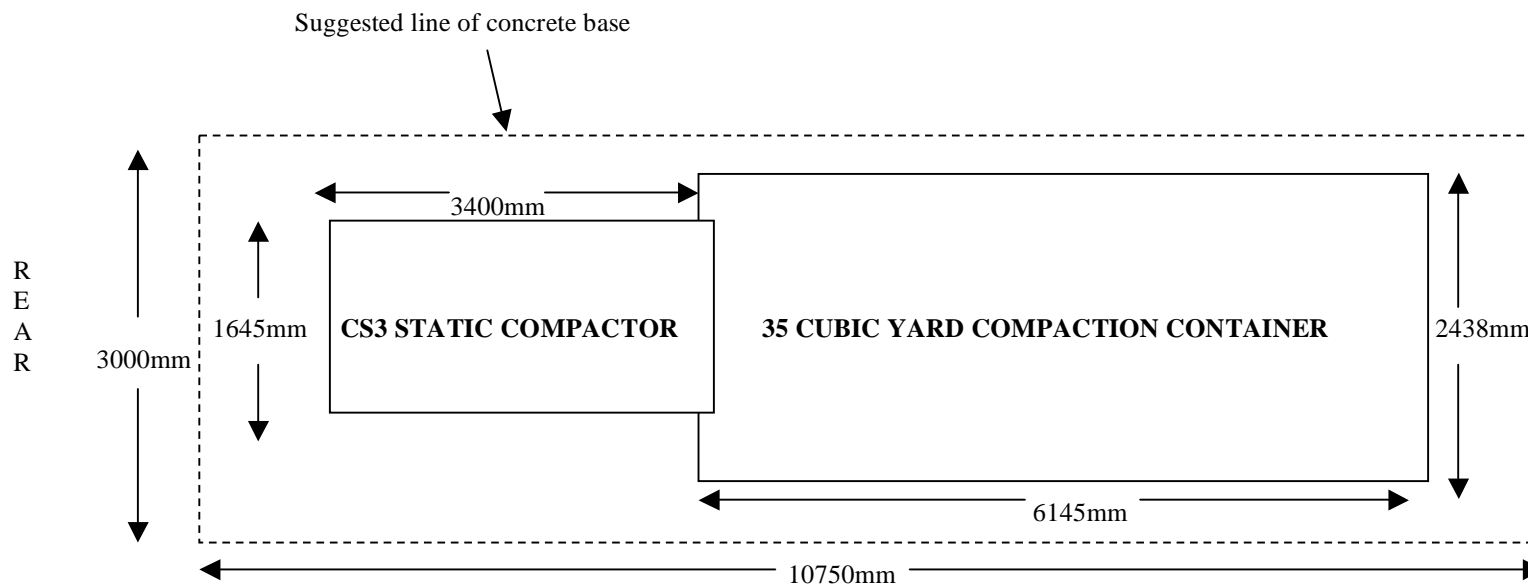

NB: Recommended thickness of concrete = 205mm (8 inches)

**Power Supply Required : 415V 3 Phase + Earth
32 Amp Motor Rated Fuses**

NB: Loading can be left hand or right hand.